



SUPERSEAL

Construction Products Ltd.

Phone: 1-800-571-1877
Fax: 604-576-2458



www.superseal.ca
info@superseal.ca

SUPERSEAL Subfloor Plus Foam Product Specification Sheet

Specifications

26_Δ lw (db), measured as per the DIN 52210 procedure.

Properties	Values
Material - Dimpled Sheet - Foam Layer	High-Density Polyethylene (HDPE) Closed Cell Polyethylene (PE)
Color - Dimpled Sheet - Foam Layer	Black White
Thickness - Dimpled Sheet Foam Layer	0.6mm (24 mil) 3mm
Area Weight (approx)	700 g/m ²
Dimple Height	8mm (0.31")
Dimple Spacing (approx)	1150 per m ²
Compressive Strength	150 kN/m ² (3200 psf)
Service Temperature Range	-40°C to +80°C
Physiological Properties	Can be ordered non-polluting for drinking water

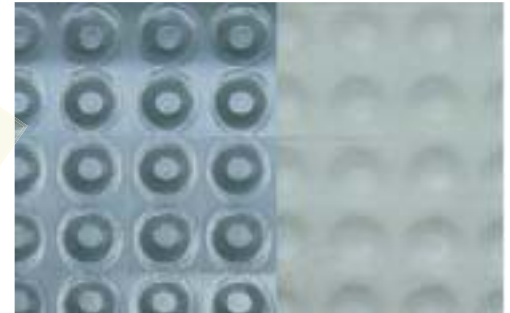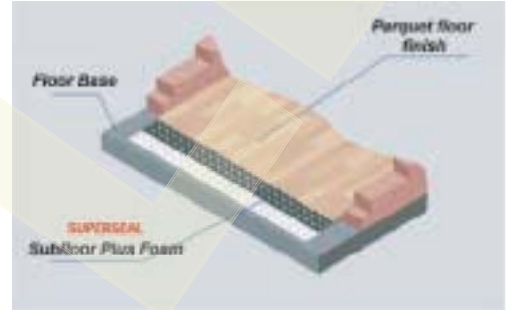

The Dimpled Sheet is resistant to a wide range of chemicals, resistant to fungus and bacterial attack, impervious to root penetration and rot proof

Areas of Application

- Sound rooms
- Under most types of flooring materials including laminate, hardwood and carpet
- Sound studios
- Interior walls and floors
- Multi-level building as flooring noise control
- Flooring insulation enhancement
- Damp rise control from substrates



Roll Sizes

6'7" x 32.8ft (215 ft²) - 2m x 10m