



EZ FLASH W&D Flashing Membrane

DESCRIPTION

EZ FLASH W&D Flashing Membrane is an economical 20-mil window & door flashing membrane. Efficient and easy to use, EZ FLASH W&D offers factory controlled uniformity with quick application. EZ FLASH W&D provides excellent moisture and air protection around windows, doors and smaller gaps and openings.

Developed specifically for the multi-family and residential construction markets, EZ Flash W&D is a self-adhering system that will exhibit tenacious grip when pressed against the substrate. It can easily be applied in horizontal and vertical applications. The flashing seams are installed in a shingle method, so splices will shed water.

ADVANTAGES

- Provides a seal around fasteners and penetrations to prevent wall assembly leaks
- Self-adhering
- Resists mechanical damage
- Easy to install, inspect and repair
- Primers available to enhance adhesion
- Compatible with Carlisle's Vapor/Air Barrier System to provide complete wall protection

TECHNICAL DATA

PROPERTY	TEST METHOD	RESULTS
Thickness	—	20 mils
Tensile	ASTM D 412 (C)	709 psi
Elongation	ASTM D 412 (C)	500%
Peel Strength	ASTM D 903	4.5 lb./in. width
Puncture Resistance	ASTM E 154	27 lbs. (min.)
Lap Adhesion	D1876 Mod.	4.5 lb/in width


STORAGE

Protect materials from excessive heat or cold. Store away from open flames, sparks or welding. For outside storage, protect cartons from rain, direct sunlight or other harmful environmental conditions. Consult with Carlisle representative for extreme high or low temperatures.

PACKAGING (Wrapped Individually)

4" wide X 100' (33.3 sq ft), 12 rolls/case, 27 cases/pallet
 6" wide X 100' (50 sq ft), 8 rolls/case, 27 cases/pallet
 9" wide X 100' (75 sq ft), 4 rolls/case, 36 cases/pallet
 12" wide X 100' (100 sq ft), 4 rolls/case, 27 cases/pallet

WOOD CAVITY WALL CONSTRUCTION

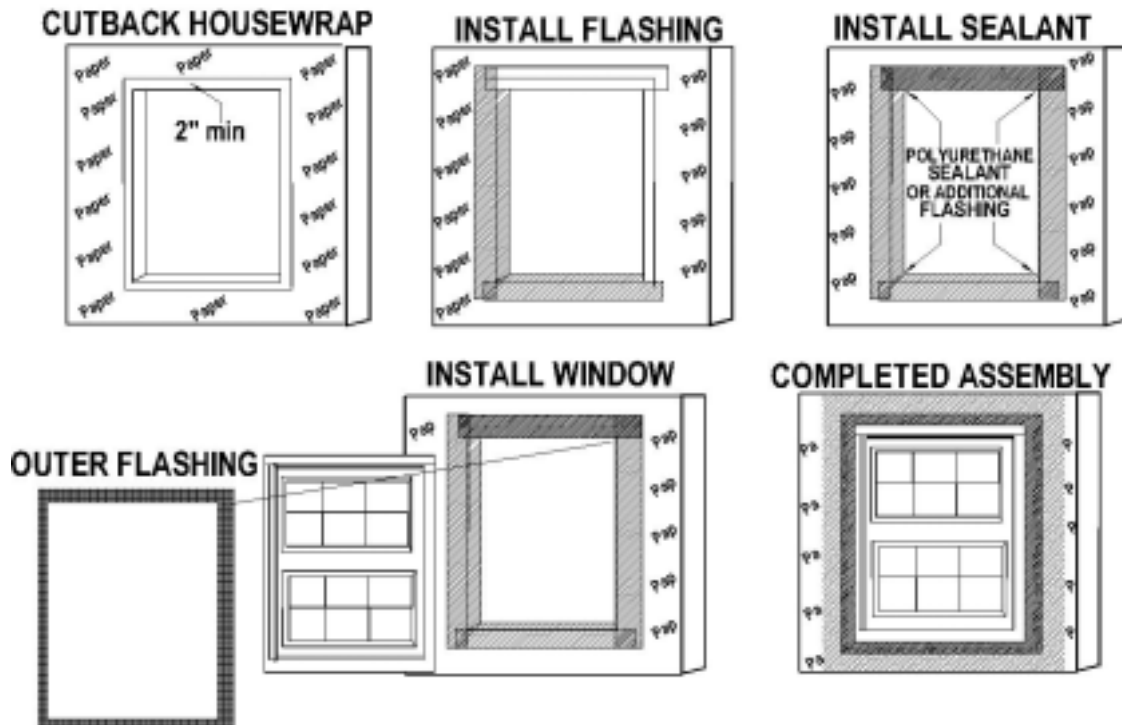

IMITATIONS

- Do not use in areas where flashing will be subject to continuous exposure to sunlight or to temperatures in excess of 180°F
- Best results are obtained when membrane is installed at temperatures above 40°F
- Do not apply primer or membrane to damp, frosty or contaminated surfaces

LIMITED WARRANTY

CARLISLE COATINGS & WATERPROOFING INCORPORATED (CARLISLE) warrants this product to be free of defects in workmanship and materials only at the time of shipment from our factory. If any CARLISLE materials prove to contain manufacturing defects that substantially effect their performance, CARLISLE will, at its option, replace the materials or refund its purchase price.

This limited warranty is the only warranty extended by CARLISLE with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. CARLISLE specifically disclaims liability for any incidental, consequential, or other damages, including but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.

The dollar value of CARLISLE'S liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the CARLISLE material in question.