



# Window & Door Flashing

## DESCRIPTION

Carlisle's Window & Door Flashing is a 40 mil composite consisting of a 36 mil self-adhering rubberized asphalt membrane laminated to a 4 mil high-density polyethylene film and a removable release sheet. The flashing is designed to provide a barrier to moisture and air infiltration around Window & Door flanges and through joints and cracks in exterior wall assemblies. It is also useful for other above grade wall flashing applications.

Window & Door Flashing is cold applied and when pressed against the substrate will adhere firmly. Its self-adhering nature allows easy installation on concrete, block, aluminum, steel, exterior gypsum sheathing or wood. The flashing is installed in a shingle method, so splices will shed water.

## ADVANTAGES

- Resists mechanical damage
- Provides a seal around fasteners and penetrations to prevent wall assembly leaks
- Self-adhering
- Compatible with CCW-705 Vapor/Air Barrier Membrane to provide a complete system of wall protection
- Easy to install, inspect, and repair

## STORAGE

Protect materials from excessive heat or cold. Store away from open flames, sparks or welding. For outside storage, protect cartons from rain, direct sunlight or other harmful environmental conditions. Consult with Carlisle representative for extreme high or low temperatures.

## PACKAGING

- 4" wide X 100' (33.3 sq ft), 6 rolls/carton, 32 cartons/pallet
- 6" wide X 100' (50 sq ft), 4 rolls/carton, 32 cartons/pallet
- 9" wide X 100' (75 sq ft), 2 rolls/carton, 48 cartons per pallet
- 12" wide X 100' (100 sq ft), 2 rolls/carton, 32 cartons/pallet

CCW-702 Solvent-Based Primer  
5 gallon pails (45 pails per pallet)

CCW-AWP Water-Based Primer  
5 gallon containers (36 containers per pallet)  
1 gallon containers (180 [45 (4-1)] containers per pallet)


CCW-714 Water-Based Primer  
5 gallon pails (45 pails per pallet)  
1 gallon pails (100 pails per pallet)

CCW-704 Mastic  
30 oz. Qt. Cartridge (12 ctg. per case), 5 gallon pails (45 pails per pallet)

## TECHNICAL DATA

| PROPERTY                    | TEST METHOD    | RESULTS                          |
|-----------------------------|----------------|----------------------------------|
| Thickness                   |                | 40 mils                          |
| Tensile                     | ASTM D 412 (C) | 500 psi                          |
| Elongation*                 | ASTM D 412 (C) | 300%                             |
| Permeance                   | ASTM E 96 (B)  | .05 perms                        |
| Pliability                  | ASTM D 146     | Passes @ -25°F<br>0.063" mandrel |
| Peel Strength               | ASTM D 903     | 7.5 lb./in. width                |
| Puncture Resistance         | ASTM E 154     | 40 lbs. (min.)                   |
| Lap Adhesion                | D1876 Mod.     | 7.0 lb/in width                  |
| H <sub>2</sub> O Absorption | ASTM D 570     | 0.12% by wt.                     |

\*% of elongation to ultimate failure of rubberized asphalt membrane

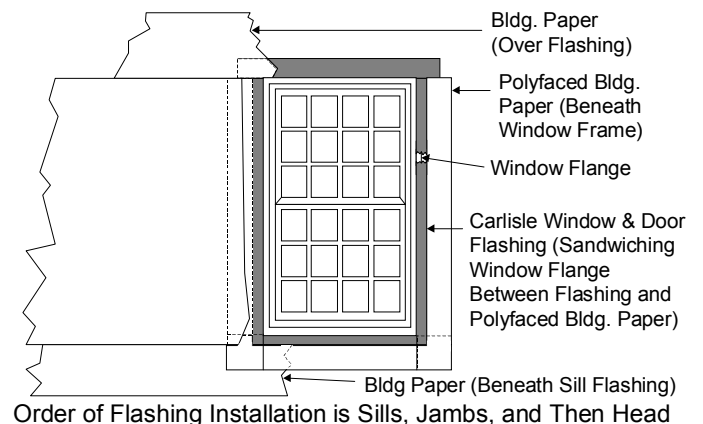

## WARNINGS AND HAZARDS

CCW-702 and CCW-704 contain flammable and combustible solvents. Avoid exposure to open flame. Avoid breathing vapors. Use only in areas with adequate ventilation. *Refer to MSDS for important warnings and product information.*

## LIMITATIONS

- Do not use in areas where flashing will be subject to continuous exposure to sunlight or to temperatures in excess of 180°F
- Concrete, masonry and some exterior gypsum substrates require priming for best results
- Best results are obtained when membrane is installed at temperatures above 40°F
- Do not apply primer or membrane to damp, frosty or contaminated surfaces
- Do not use over sealants containing coal tar or polysulfides. If these materials are present they must be removed and the surfaces thoroughly cleaned.

## LIMITED WARRANTY

CARLISLE COATINGS & WATERPROOFING INCORPORATED (CARLISLE) warrants this product to be free of defects in workmanship and materials only at the time of shipment from our factory. If any CARLISLE materials prove to contain manufacturing defects that substantially effect their performance, CARLISLE will, at its option, replace the materials or refund its purchase price.

This limited warranty is the only warranty extended by CARLISLE with respect to its materials. There are no other warranties, including the implied warranties of merchantability and fitness for a particular purpose. CARLISLE specifically disclaims liability for any incidental, consequential, or other damages, including but not limited to, loss of profits or damages to a structure or its contents, arising under any theory of law whatsoever.

The dollar value of CARLISLE's liability and buyer's remedy under this limited warranty shall not exceed the purchase price of the CARLISLE material in question.

